



FRONT VIEW

Screws M8 x 1,25mm must be screwed down 16mm (16.5mm max) into the Al/Fe flange.

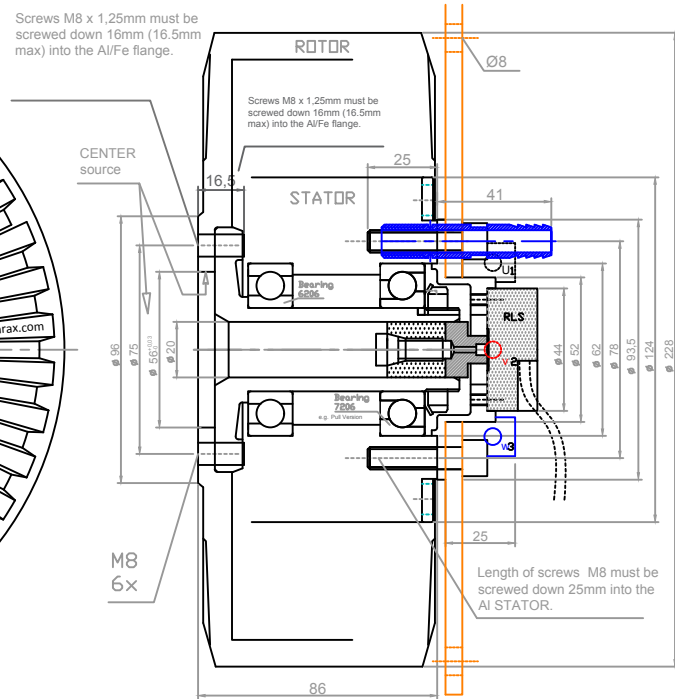

Length of screws M8 must be screwed down 25mm into the Al STATOR.

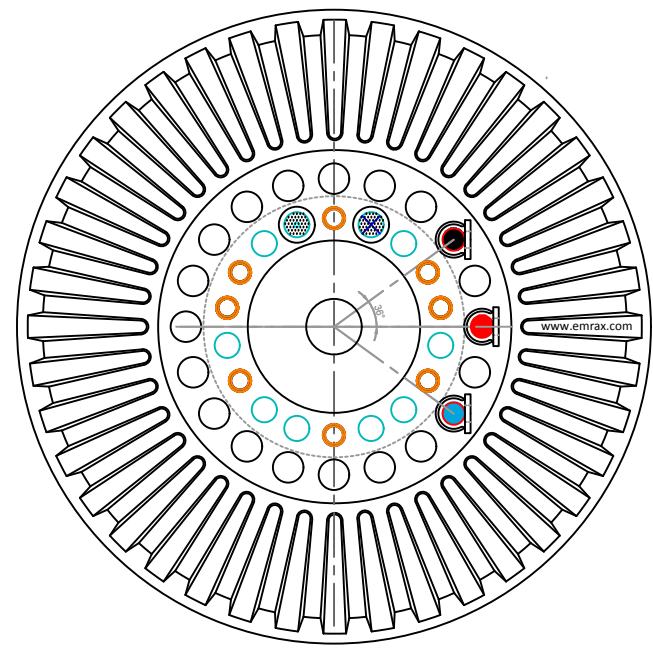

BACK VIEW

Bearings 6206:6206 - Front and back bearing are for radial forces (standard).
 Bearings 6206:7206 - Front bearing is for radial forces, back bearing is for axial-radial forces. Bearing combination is for pull mode (for e.g. air propeller).
 Bearings 6206:3206 - Front bearing is for radial forces, back bearing is for axial-radial forces. Bearing combination is for pull-push mode. "O" bearing orientation.

EMRAX 228

240 Nmp 100kW at 5500 RPM, weight: 12,5kg