

EMRAX 208 is a compact axial flux permanent magnet synchronous electric motor with high power/torque density.






The 208 was the first motor developed by EMRAX. Its development began back in 2005 and was originally used in company's founder glider aircraft.

Nowadays the development on the motor continuous and it has found many different uses outside of aviation. Contact us for more!

## EMRAX 208

DIAMETER   LENGTH	208 mm   85 mm
WEIGHT	9,4-10,3 kg
COOLING	air / water / combined
PEAK   CONTINUOUS POWER	86 kW   56 kW*
PEAK   CONTINUOUS TORQUE	150 Nm   90 Nm*
MAXIMUM SPEED	7000 RPM
OPERATING VOLTAGE	50 - 580 V
EFFICIENCY	up to 96%*
POSITION SENSOR	resolver / encoder

\*Subject to motor configuration, drive cycle, thermal conditions, and controller capability.

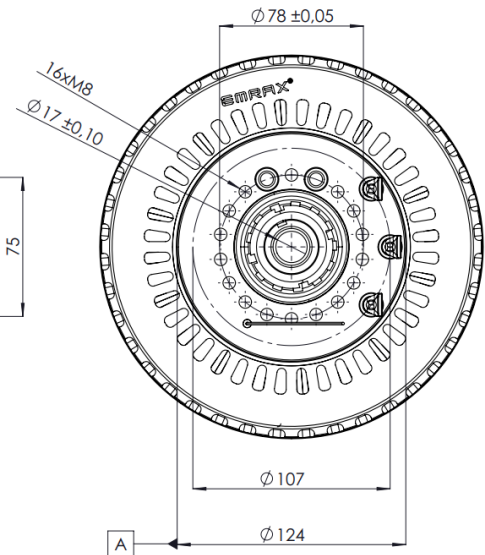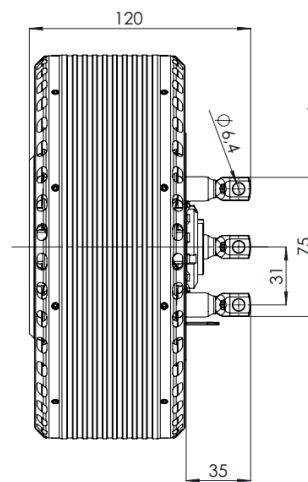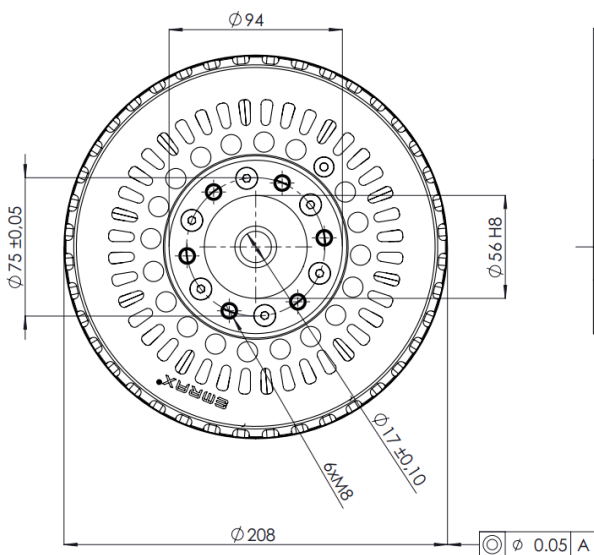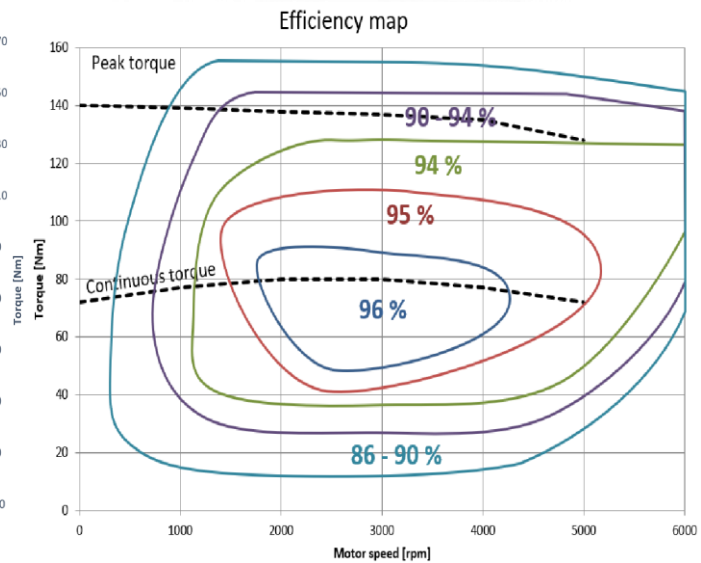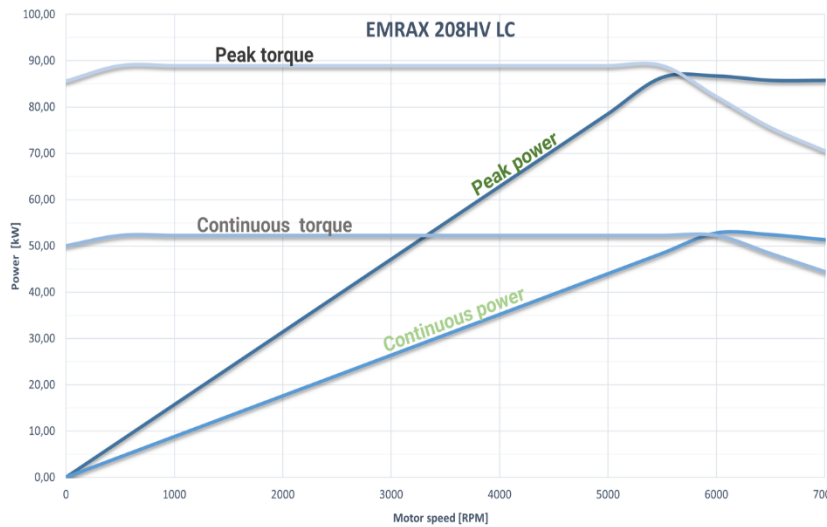

**EMRAX 208  
High Voltage**
**EMRAX 208  
Medium Voltage**
**EMRAX 208  
Low Voltage**

AC = Air cooled LC = Liquid cooled CC = Combined cooled (Air + liquid)	AC	LC	CC	AC	LC	CC	AC	LC	CC
<b>Ingress protection</b>	IP21	IP65	IP21	IP21	IP65	IP21	IP21	IP65	IP21
<b>Cooling specifications</b>	ambient air 20°C 20 m/s	min. 6 l/min, max. 50°C	AC+LC*	ambient air 20°C 20 m/s	min. 6 l/min, max. 50°C	AC+LC*	ambient air 20°C 20 m/s	min. 6 l/min, max. 50°C	AC+LC*
<b>Maximum motor temperature [°C]</b>	120								
<b>Motor connection type</b>	UVW or 2x UVW			UVW or 2x UVW			UVW or 2x UVW		
<b>Design voltage - nominal [V<sub>DC</sub>]</b>	580			390			140		
<b>Motor peak efficiency [%]</b>	96%								
<b>Peak power S2 2min [kW]</b>	86 kW at 6000 RPM								
<b>Continuous power S1 (kW)</b>	33	52	56	33	52	56	33	52	56
<b>Peak torque [Nm]</b>	150								
<b>Continuous torque [Nm]</b>	54	84	90	54	84	90	54	84	90
<b>Limiting speed [RPM]</b>	7000								
<b>Motor constant K<sub>v</sub></b>	15,44			24,81			63,62		
<b>Motor constant K<sub>T</sub></b>	0,62			0,38			0,15		
<b>Peak motor current [A<sub>RMS</sub>]</b>	240			400			1000		
<b>Continuous motor current [A<sub>RMS</sub>]</b>	140			220			560		
<b>Internal phase resistance at 25 °C [mΩ]</b>	12,27			5,51			0,90		
<b>Induction between two phases [μH]</b>	175,5			73,5			7,5		
<b>Induced voltage [V<sub>RMS</sub>/RPM]</b>	0,0482			0,0300			0,0117		
<b>Magnetic flux – axial [V<sub>s</sub>]</b>	0,03758			0,02338			0,00912		
<b>Temperature sensor on the stator windings</b>	KTY 81/210								
<b>Number of pole pairs</b>	10								
<b>Winding configuration</b>	star								
<b>Rotor Inertia [kg*m<sup>2</sup>]</b>	0,01569								
<b>Bearing configuration</b>	6206   3206								
<b>Weight [kg]</b>	9,4	10,3	10,0	9,4	10,3	10,0	9,4	10,3	10,0

\*Combined cooled motor (CC) requires cooling specifications from air and liquid cooled motors, to reach its specifications. It cannot only be cooled as an air-cooled motor. Every EMRAX motor requires sufficient air circulation. The motors should not be completely enclosed in any condition. Please check EMRAX motor manual to learn more. Performance in your application will depend on your installation details and boundary conditions. Please contact us to learn more.

Values given are for a standard 3 phase UVW version, please consult EMRAX on 2x UVW values.