


List of recommended controllers

V1.4- 10. April 2026

How to choose the correct controller for your EMRAX motors?

EMRAX motors/generators are axial flux synchronous three phase BLDC electric motors / generators, therefore, the controllers need to provide a three-phase PWM sinusoidal signal for optimal performance. It is recommended to run EMRAX motors in FOC mode.

Detailed instructions regarding the selection of the best controller are described on the next page.

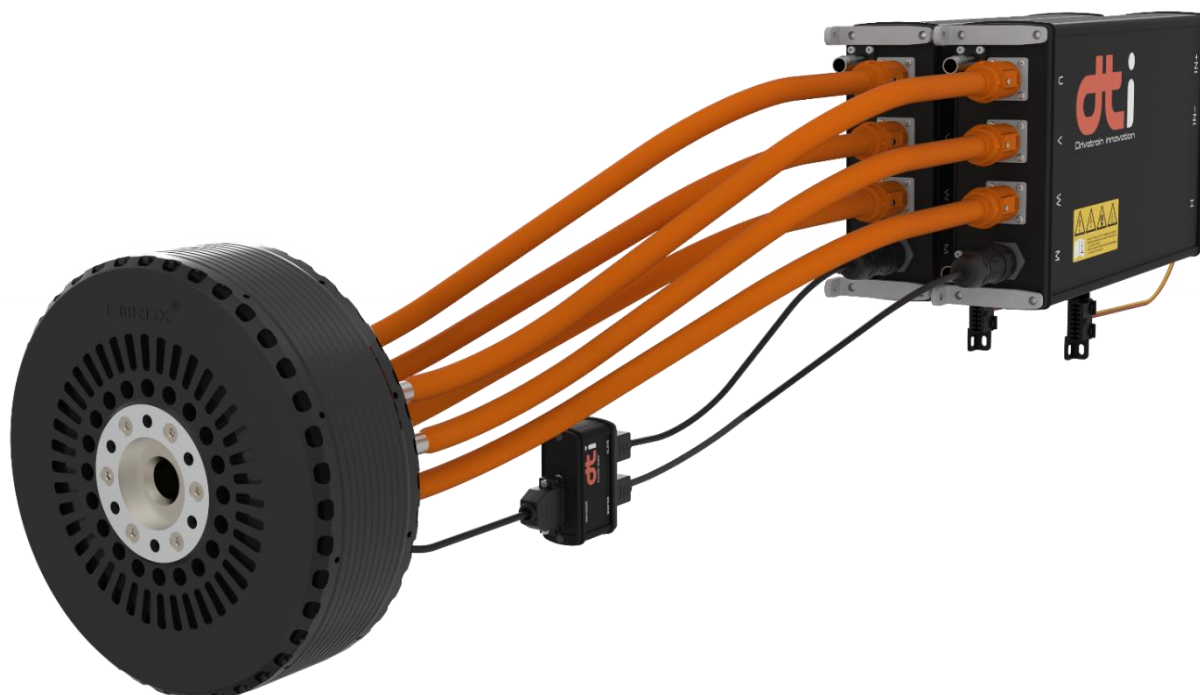

1. DETERMINE YOUR REQUIRED POWER, TORQUE AND SPEED

Power, torque and speed are the most important requirements when choosing your electric motor. If you haven't determined all three values yet, please refer to the relationship between the variables below:

$$power [kW] = \frac{\text{torque[Nm]} \cdot \text{speed [RPM]}}{9549}$$

2. CALCULATE THE REQUIRED VOLTAGE AND CURRENT

It is important to match your EMRAX motor to your system voltage and available current output. Voltage is directly proportional to the motor's speed, while the controller's output current limitation will determine the maximum torque of your motor. If not constrained by requirements, we recommend increasing the voltage of your power supply as much as you can, as this will decrease the current, thus improving the efficiency of the system.

Each motor has its own speed constant K_v [RPM/V_{DC}], which tells us how fast the motor is going to spin at a given applied voltage. Similarly, motors can be described by the constant K_t [RPM/V_{DC}], which tells us how much current the motor requires to output a desired torque.

Voltage required:

$$voltage [Vdc] = \frac{\text{speed [RPM]}}{K_v[\text{RPM/Vdc}]}$$

Current required:

$$current [Arms] = \frac{\text{torque [Nm]}}{K_t[\text{Nm/Arms}]}$$

*When doing the calculations, please take the motor limits in consideration (peak torque values, maximum speeds, etc.)

3. CHECK THE AVAILABLE CONTROLLERS

Now it is important to match your EMRAX motor to your system voltage and available current output. Voltage is directly proportional to the motor's speed, while the controller's output current limitation will determine the maximum torque of your motor.

If not constrained by requirements, we recommend increasing the voltage of your power supply as much as you can, as this will decrease the current, thus improving the efficiency of the system.

4. HIGH-POWER CURRENT LIMITATIONS

If you are designing a high-power electric drivetrain, there is a possibility that none of the recommended controllers can satisfy your current requirement. In this case, we offer a 2x UVW motor winding configuration that allows you to connect two motor controllers to a single EMRAX motor. This configuration splits the motor's internal windings in two halves, which allows you to feed the motor with two controllers and provide enough current for the motor. 2x UVW configuration is also used for safety critical applications, where redundancy is required.

Please note that in case you choose a 2x UVW winding solution, you will need to provide a position signal for both controllers. This can be achieved by using a signal splitter for your encoder, or using a tandem resolver configuration.

5. FURTHER QUESTIONS

Feel free to reach out to us at support@emrax.com for any additional questions that you may have.

Manufacturer	Model	Cooling	IP	Current peak [Arms]	Current cont. [Arms]	Voltage peak (V _{DC})	Recommended position sensor	Weight [kg]	Dimensions L x W x H [mm]
 <p>Embedded system solutions</p> <p>www.emsiso.com</p> <p>**IP rating IP66 & IP67 (with mated connectors). Other IP ratings on request</p>	L30B	LC/AC	66 & 67*	650	450	60	Encoder RLS RM44SC	2.6	201 x 165 x 105
	L30B	LC/AC	66 & 67*	450	300	120		2.6	201 x 165 x 105
	L50B	LC	66 & 67*	1200	1000	60		7	332 x 226 x 93
	L50B	LC	66 & 67*	1000	700	120		7	332 x 226 x 93
	H10B	LC/AC	66 & 67*	150	100	470		5	183 x 271 x 96
	H10B	LC/AC	66 & 67*	75	60	870		5	183 x 271 x 96
	H20B	LC	66 & 67*	400	210	470		7.3	253 x 316 x 102
	H20B	LC	66 & 67*	210	170	870		7.3	253 x 316 x 102
 <p>nx-tech.com</p>	W90	LC	67	410	280	450	5 pole pair Resolver (TS2620N1095E161)	3.1	249 x 170 x 68
	E160	LC	67	630	480	450		4.5	297 x 207 x 66
	E8160	LC	67	350	300	850		4.5	297 x 207 x 66
	R300	LC	67	560	350	850		6.7	362 x 215 x 90
 <p>drivetraininnovation.com</p>	HV-850	LC	65	600	365	800	Encoder RLS RM44SI	6.8	420 x 213 x 77
	HV-550	LC	65	390	365	800		6.8	420 x 213 x 77
 <p>cascadiamotion.com</p>	CM200DX	LC	67	740	300	480	5 pole pair Resolver (TS2620N1095E161)	6.75	330 x 188 x 97
	CM200DZ	LC	67	400	200	840		6.75	330 x 188 x 97
	CM350DZ	LC	67	800	500	540		17.4	358 x 299 x 99
 <p>Drives made in Germany</p> <p>unitek-industrie-elektronik.de</p>	Bamocar 700-160	LC	65	120	80	700	5 pole pair Resolver (TS2620N1095E161)	3.5	280 x 200 x 90
	Bamocar 400-400	LC	65	300	200	400		8.5	355 x 230 x 135
	Bamocar 700-250	LC	65	187	125	700		8.5	355 x 230 x 135
	Bamocar 700-400	LC	65	300	200	700		8.5	355 x 230 x 135
	Bamocar 700-900	LC	65	675	450	700		15.5	450 x 313 x 135
	Bamobil-IM 160-300	LC	65	225	150	120		6.8	280 x 200 x 90
 <p>scottdrive.co.nz</p>	SD80LV	LC	65	800	600	140	Encoder RLS RM44IE	5	270 x 150 x 65
	SD100LV	LC	65	1000	800	140		5	270 x 150 x 65
	SD100	LC	65	770	400	500		9	385 x 320 x 100
	SD200	LC	65	900	450	500		10	385 x 320 x 100
	SD250	LC	65	800	700	450		16.5	460 x 350 x 108
	SD300	LC	65	600	450	800		16.5	460 x 350 x 108
	SD500	LC	65	900	700	800		16.5	460 x 350 x 108

Please note, that all data collected in the table above are subject to change and should be checked for the latest updates with your favourite controller manufacturer!